DWG NO. 5000-0008-01

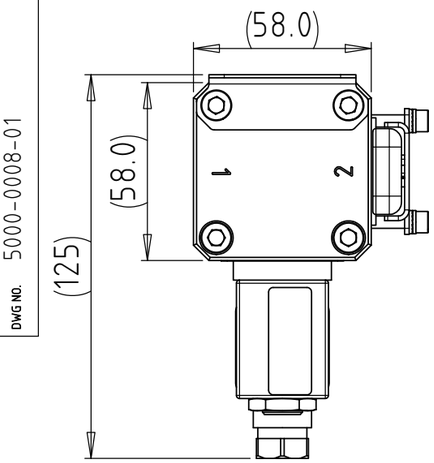

NOTES:
Maximum Working Pressure:12 barg
Maximum Temperature: 85°C
Minimum Temperature: -40°C

Anodised 'CLEAR' - typical 15 micron thickness

Maximum Flow: 1000 Nl/m @ 10 bar

ISO 8573:1 Quality Classes
Class 2. Dirt
Class 7. Water

SKROLL™
AIR PURIFICATION

MNR	5000-0008
Description	MGF/ID-3-IF
Port	G3/8"
Max Press.	12 bar
Max Temp.	+85°C
Min Temp.	-40°C
Date	yyWxx

2 → 1

THE FOLLOWING INFORMATION IS TO BE INDICATED ON THE LABEL:

FOIL LABEL SIZE 40 MM X 50MM

Example part number and date of manufacture

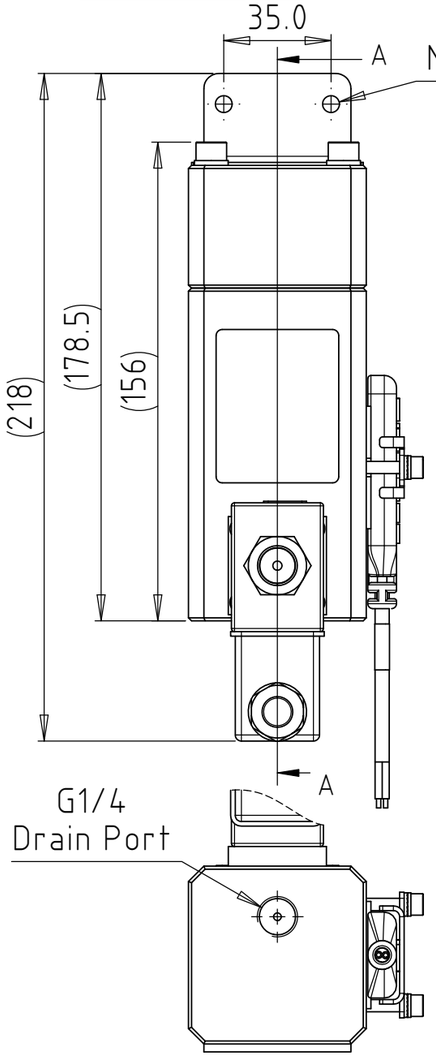

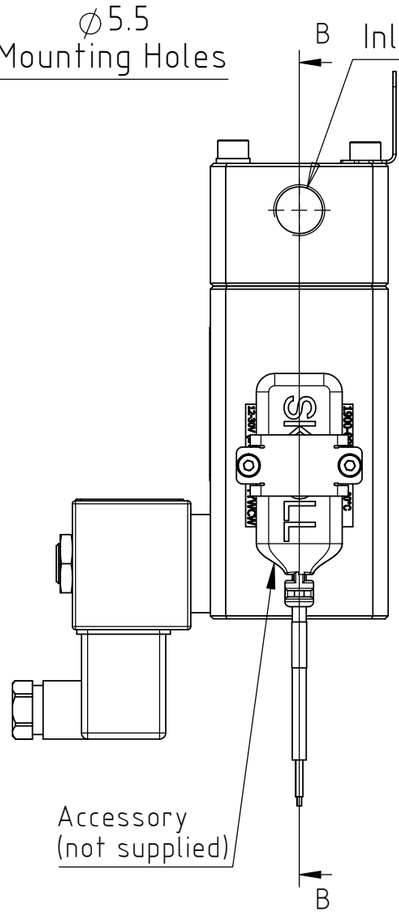

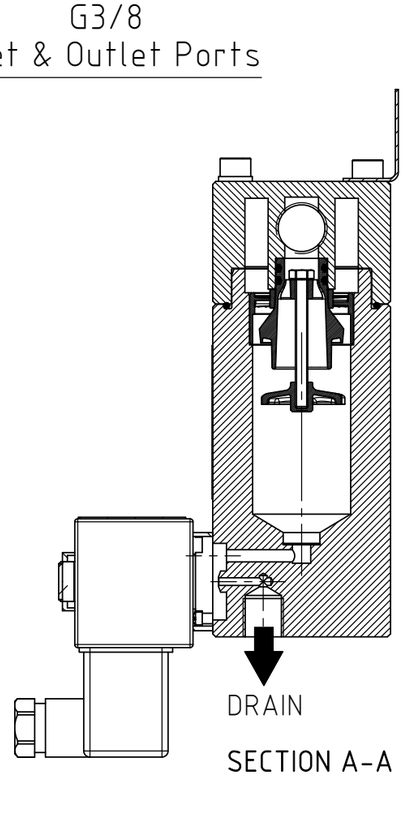

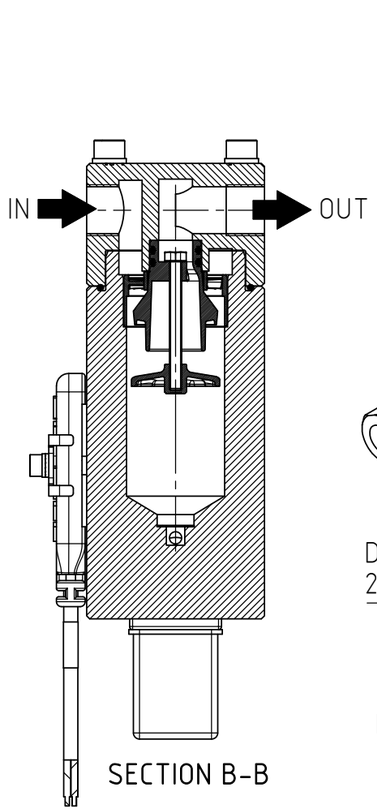

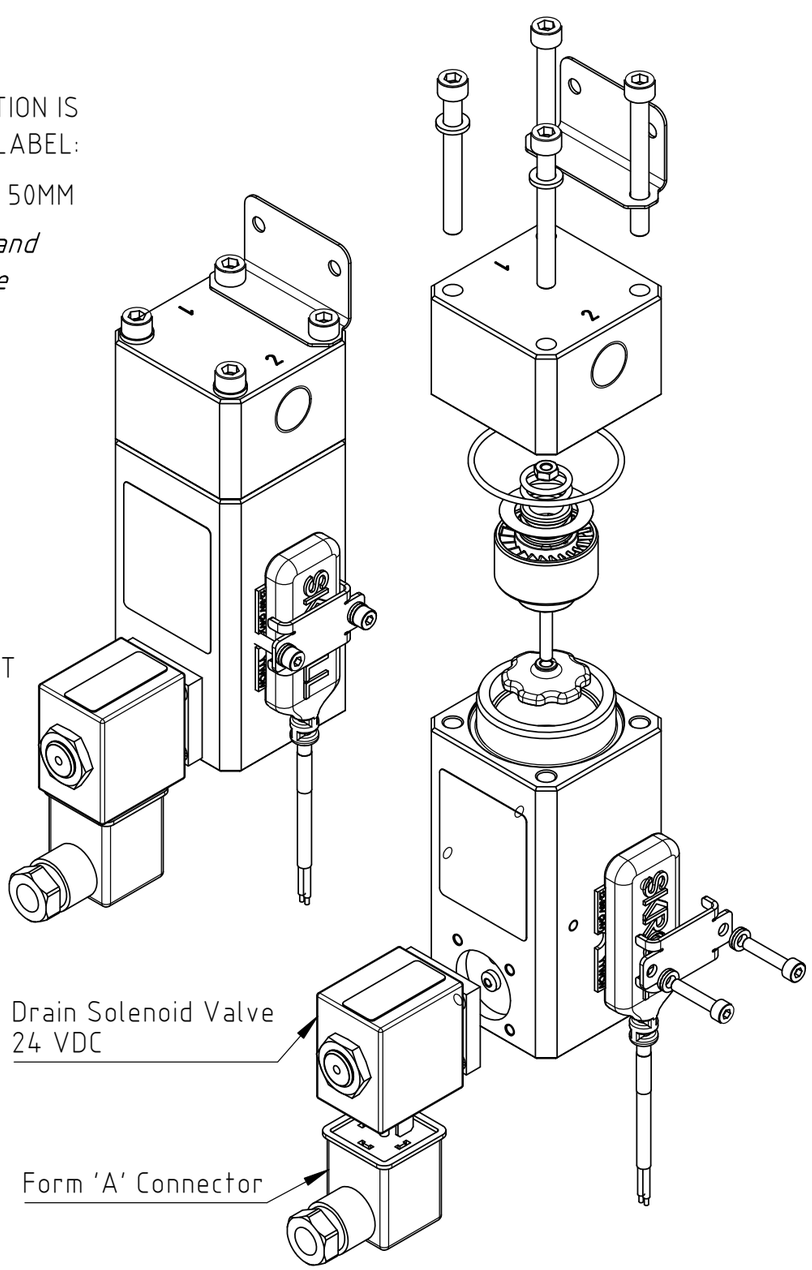

ACCESSORY	
8000-0052	Filter Drain Heater [80°C] - 24V

REVISION	A							
ENG MOD								
DRAWN	MAC							
CHECKED	CB							
APPROVED	CB							

GENERAL TOLERANCES UNLESS OTHERWISE STATED

DIMENSIONS:
X ± 0.5mm
X.X ± 0.25mm
X.XX ± 0.1mm

ANGLES: ± 0.5°

SURFACE FINISH: 3.2

MATERIAL: SEE DETAILS

FINISH: SEE DETAILS

WEIGHT (KG): 1.172

Air Purification Skroll™

© AIR PURIFICATION SKROLL' 09/10/2025.
THE ORIGINAL OF THIS DRAWING IS COPYRIGHT AND CONTAINS CONFIDENTIAL INFORMATION.
IT IS THE PROPERTY OF AIR PURIFICATION SKROLL' WITHOUT WHOSE PERMISSION IT MAY NOT BE COPIED, SHOWN OR HANDED TO A THIRD PARTY OR OTHERWISE USED AND IT IS TO BE RETURNED PROMPTLY UPON REQUEST TO AIR PURIFICATION SKROLL™.

TITLE: MGF/ID-3-IF

DWG NO. 5000-0008-01

REVISION: A×a

SCALE - 1:2
DO NOT SCALE DRAWING

SHEET 1 OF 1

SHEET SIZE A3